




FR SERIES

ROTATING PULVERIZER



- FRANTUMATORE GIREVOLE
- BROYEUR ROTATIF
- DEMOLEDOR ROTATIVO
- DREHBARE PULVERISIERER

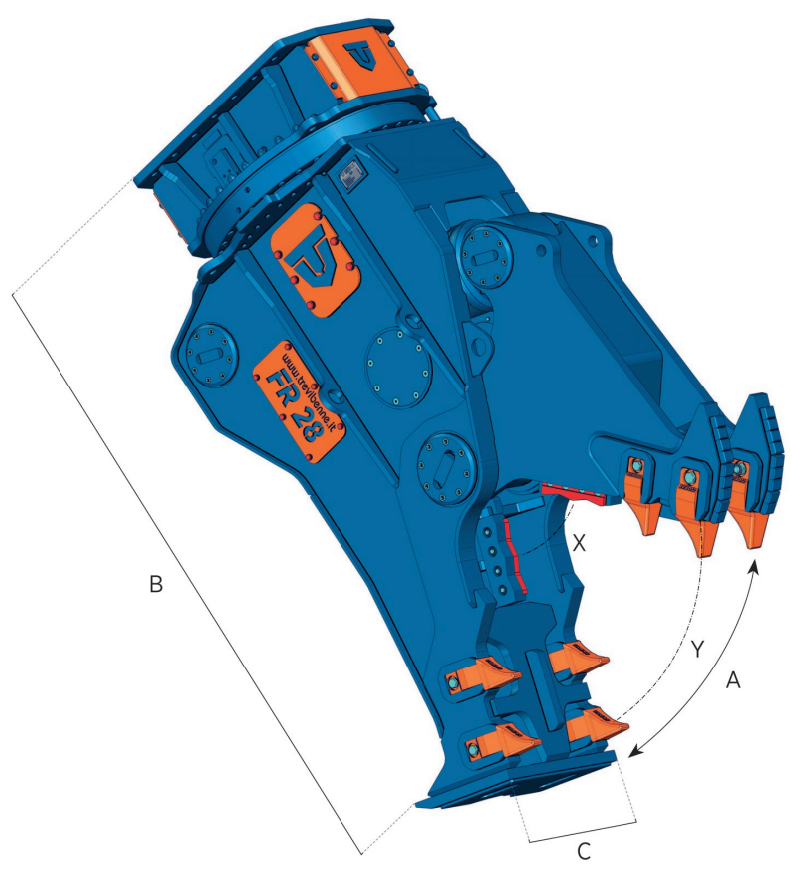

NEW PRODUCT

		FR 05	FR 10	FR 13	FR 18	FR 23	FR 28	FR 38
	kg.	555	1035	1355	1990	2550	3200	3810
A	mm.	560	655	700	780	880	930	1000
B	mm.	1460	1840	1975	2110	2450	2470	2620
C	mm.	335	400	440	530	550	615	695
	mm.	140	140	180	220	260	260	260
X	t.	100	123	191	235	294	371	426
Y	t.	35	44	60	78	97	121	132
Ø max	mm.	20	25	30	35	40	45	50
	bar	320	320	350	350	350	350	350
	l/min.	80 / 150	150 / 250	180 / 250	180 / 250	200 / 300	250 / 350	300 / 400
	bar	140	140	140	140	140	140	140
	l/min.	5	15 / 30*	15 / 30*	20 / 40*	20 / 40*	25 / 50*	25 / 50*
		/	/	/	/	/	/	/

*Double motor / *Doppio motore / *Double moteur / *Doble motor / *Doppelmotor

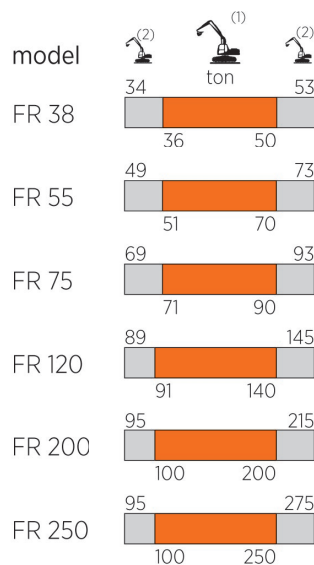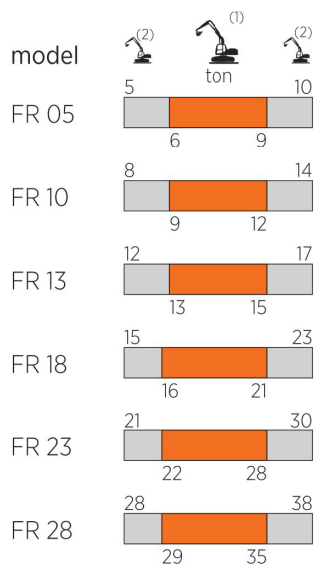

- (1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination

		FR 55	FR 75	FR 120	FR 200	FR 250
Kg	kg.	5850	8100	13100	22300	24640
A	mm.	1120	1440	1660	1900	2050
B	mm.	2995	3255	3865	4480	5140
C	mm.	735	800	920	1400	1400
	mm.	260	325	400	500	500
X	t.	527	543	844	1057	1215
Y	t.	152	201	263	464	483
Ø max	mm.	60	75	90	100	110
max	bar	350	350	350	350	350
max	l/min.	400 / 500	450 / 600	500 / 800	900 / 1200	900 / 1200
max	bar	140	140	140	250	250
max	l/min.	25 / 50*	70	80	80	80
		✓	✓	✓	✓	✓

*Double motor / *Doppio motore / *Double moteur / *Doble motor / *Doppelmotor

